


Products in Family

GRSX6440/4GB (2 x 2GB 1R DIMMs)
 GRSX6440/8GB (2 x 4GB 2R DIMMs)



Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.20" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage: 1.8 V \pm 0.1 Error Checking and Correction (ECC) bits Supports Intel SDDC and Chipkill Advanced ECC Features Fully RoHS Compliant		Each GRSX6440 upgrade consists of a matched pair of DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.
Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRSX6440/4GB GRSX6440/8GB	X4261A X4262A	Sun Blade X6240 and X6440 Server Modules

Front view

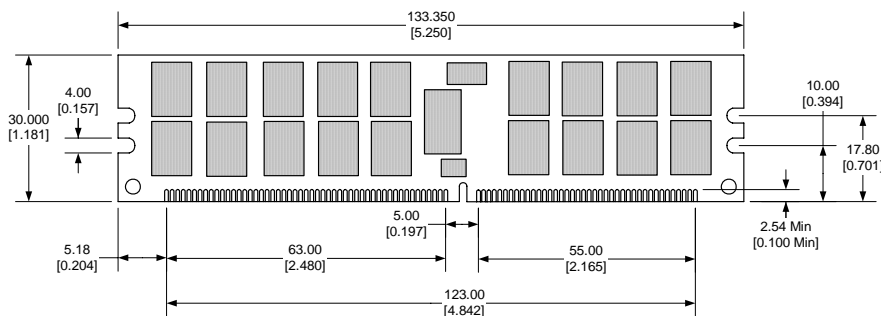


Notes

Tolerances on all dimensions except where otherwise indicated are \pm .13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

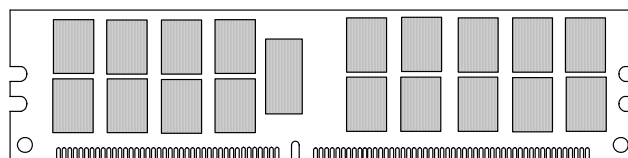

Side view

